

## **Stainless Steel Foam Manifold**



The FoamPro foam manifold incorporates the flowmeter sensor, main waterway check valve, concentrate injection port and drain port all into one compact assembly. Each manifold is tested to 500 psi to guarantee integrity and is delivered with FoamPro's unmatched accuracy.

### **Features & Benefits:**


- Equipped with Victaulic connections on both ends:
  - Reduces installation time and space requirements
  - Eliminates thread leakage
  - Allows for easier service access
- 304 stainless steel construction offers extreme corrosion resistance
- Butterfly-style check valve:
  - Provides bubble-tight seal
  - Prevents back flow of foam solution into water source
  - Designed for maximum water flow with minimal friction loss
- Available in standard pipe sizes from 1-1/2 to 4-inch



# Stainless Steel Foam Manifold

## SPECIFICATIONS

Unmatched Accuracy

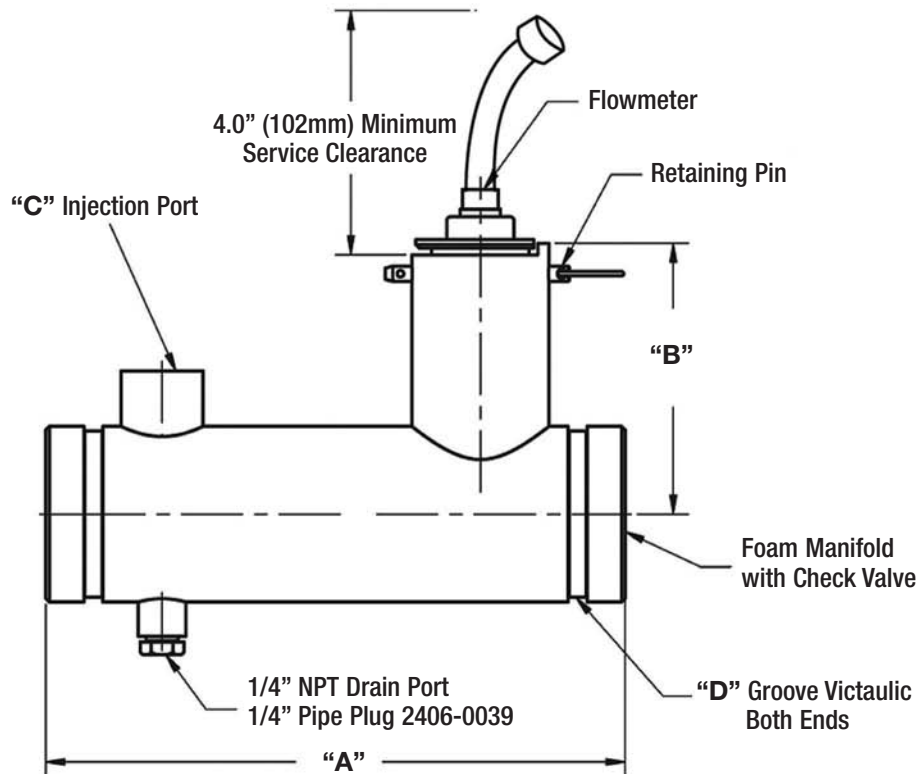

| Part No.  | "A"   | "B"  | "C"  | "D"    | Maximum Accuracy Flow Range   | Maximum Operating Flow Range |
|-----------|-------|------|------|--------|-------------------------------|------------------------------|
| 2660-0051 | 8.5"  | 4.0" | 1/2" | 1-1/2" | 10-320 gpm (38-1,211 L/min)   | 3-380 gpm (11-1,438 L/min)   |
| 2660-0052 | 8.5"  | 4.3" | 1/2" | 2"     | 15-520 gpm (57-1,968 L/min)   | 5-625 gpm (19-2,366 L/min)   |
| 2660-0053 | 9.5"  | 4.4" | 3/4" | 2-1/2" | 20-750 gpm (76-2,839 L/min)   | 8-900 gpm (30-3,407 L/min)   |
| 2660-0054 | 9.5"  | 4.8" | 3/4" | 3"     | 30-1150 gpm (114-4,353 L/min) | 12-1380 gpm (45-5,224 L/min) |
| 2660-0055 | 11.5" | 5.3" | 1"   | 4"     | 55-1980 gpm (208-7,495 L/min) | 20-2380 gpm (75-9,010 L/min) |



**Pentair**

**SPRAY & INJECTION TECHNOLOGIES GROUP**

375 Fifth Avenue NW • New Brighton, Minnesota 55112 USA  
 Phone: (651) 766-6300 • 800-533-9511 • Fax: (651) 766-6614  
 foampro@pentair.com • [www.foampro.com](http://www.foampro.com)